

FIRE RATED DOOR CORES

Technical Data Sheet

ENHANCING
FIRE SAFETY

2025



NON FIRE 44mm

- 44mm Internal Door Blank
- Weight +/- 18.5 kg m2

SIZES	915*2135
AVAILABILITY	1045*2155
	1070*2200



FD60 PLUS 50mm

- 50mm Internal Fire Door Blank
- Fire Rated to 60 minutes
- Weight +/- 30.3 kg m2

SIZES	915*2135
AVAILABILITY	1045*2155
	1070*2200



FD60 54mm

- 54mm Internal Fire Door Blank
- Fire Rated to 60 minutes
- Weight +/- 33.5 kg m2

SIZES	915*2135
AVAILABILITY	1045*2155
	1070*2200



FD90 60mm

- 60mm Internal Fire Door Blank
- Fire Rated to 90 minutes
- Weight +/- 33.5 kg m2


SIZES	915*2135
AVAILABILITY	1045*2155
	1070*2200



FD90 64mm

- 64mm Internal Fire Door Blank
- Fire Rated to 90 minutes
- Weight +/- 40.3 kg m2

SIZES	915*2135
AVAILABILITY	1045*2155
	1070*2200

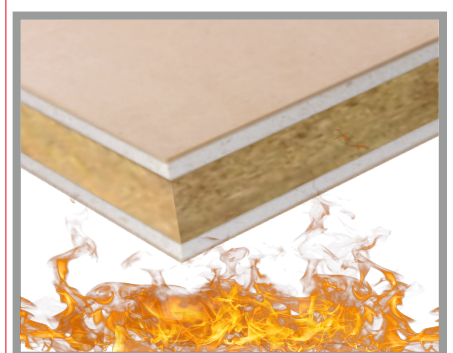

FD120 64mm

- 64mm Internal Fire Door Blank
- Fire Rated to 120 minutes
- Weight +/- 48 kg m2

SIZES	915*2135
AVAILABILITY	1045*2155
	1070*2200



+971 6551 1000
+971 2675 6600



info@arakgroup.com
www.arakwood.com



Industrial area 13 Sharjah UAE.
Mussafah Ind, Area, M17 Abu Dhabi